

CUSTOM COIL & Flat Sheets



BENEFITS

- » Vast selection of designer colors and gauges
- » Custom coil widths and lengths (minimum of 200 linear feet)
- » Custom trim in matching colors
- » Supporting products (fasteners, underlayment, clips and closures)
- » Quick turnaround time
- » Convenient locations for easy pick up
- » Job site delivery (for a fee)




FLAT SHEETS

- » Available in full width up to 21 feet
- » 26 Gauge in 43" width
- » 24 Gauge in 43" width
- » 24 Gauge in 48" width (limited colors)
- » 22 Gauge in 43" width (Galvalume® Plus, Bright White, and Weathered Steel only)

PACKAGING

Coils are packaged with rain cap, ID and OD protector.

Flats are packaged with strippable plastic and can be rolled or palletized (additional pallet charge).

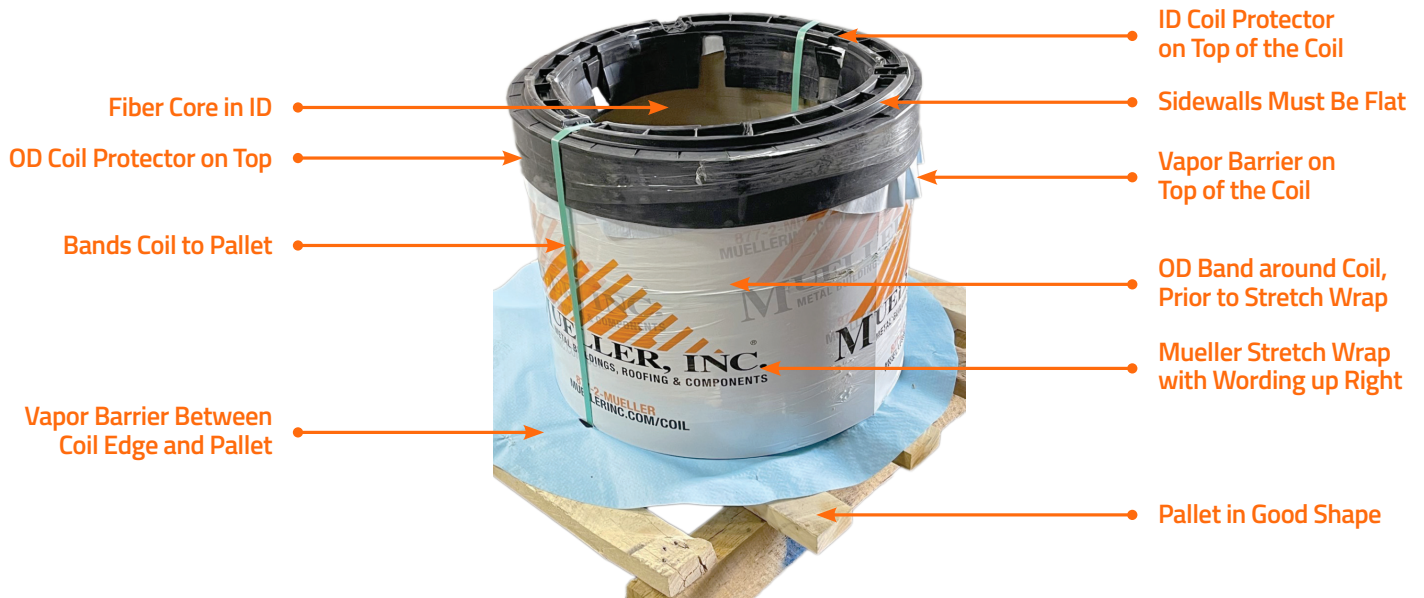

COLORS AVAILABLE BY COIL TYPE

SIGNATURE® 200 24 Gauge SMP Colors		26 Gauge Tensile Strength 50/80 ksi	24 Gauge Tensile Strength 50 ksi	22 Gauge Tensile Strength 50 ksi	Thermal Emittance ¹ Range 0 to 1 (±0.02)	Solar Reflectance ² (Initial SR) Range 0 to 1	Film Integrity (Years)	Color Fade ASTM D 2244 (Years)	Chalk ASTM D 4214, Method A (Years)
Galvalume® Plus	●	●	●	●	0.19	0.69	n/a	n/a	n/a
Polar White (Polyester)	●				0.88	0.61	25	n/a	n/a
High Gloss White	●				0.86	0.73	45	30	30
White	●				0.83	0.62	45	30	30
Bright White	●	●	●	●	0.88	0.70	45	30	30
Hawaiian Blue	●	●	●		0.86	0.32	45	30	30
Cobalt Blue	●	●	●		0.83	0.26	45	30	30
Light Stone	●	●	●		0.87	0.56	45	30	30
Saddle Tan	●	●	●		0.87	0.47	45	30	30
Desert Sand	●	●	●		0.88	0.43	45	30	30
Coffee Brown	●	●	●		0.86	0.29	45	30	30
Burnished Slate	●	●	●		0.86	0.33	45	30	30
Ash Gray	●	●	●		0.87	0.46	45	30	30
Deep Gray	●	●	●		0.86	0.32	45	30	30
Charcoal Gray	●	●	●		0.86	0.36	45	30	30
Evergreen	●	●	●		0.83	0.30	45	30	30
Ivy Green	●	●	●		0.87	0.29	45	30	30
Scarlet Red	●	●	●		0.86	0.31	45	30	30
Rustic Red	●	●	●		0.87	0.38	45	30	30
Wine Red	●	●	●		0.83	0.29	45	30	30
True Black	●	●	●		0.83	0.31	45	30	30
Matte Black	●	●	●		0.88	0.26	45	30	30
Smokey Pewter	●	●	●		0.88	0.38	45	30	30
Dark Charcoal	●	●	●		0.88	0.19	45	30	30
Dark Bronze	●	●	●		0.87	0.23	45	30	30
Orange* (Polyester)	●	●	●		n/a	n/a	n/a	n/a	n/a
Weathered Steel†			●		n/a	n/a	n/a	n/a	n/a
SIGNATURE® 300 24 Gauge PVDF Colors		26 Gauge Tensile Strength 50/80 ksi	24 Gauge Tensile Strength 50 ksi	22 Gauge Tensile Strength 50 ksi	Thermal Emittance ¹ Range 0 to 1 (±0.02)	Solar Reflectance ² (Initial SR) Range 0 to 1	Film Integrity (Years)	Color Fade ASTM D 2244 (Years)	Chalk ASTM D 4214, Method A (Years)
Snow White			●		0.87	0.65	45	35	35
Bone White	●		●		0.86	0.68	45	35	35
Pacific Blue	●		●		0.83	0.25	45	35	35
Harbor Blue			●		0.86	0.27	45	35	35
Almond	●		●		0.88	0.64	45	35	35
Brownstone	●		●		0.88	0.47	45	35	35
Medium Bronze			●		0.86	0.34	45	35	35
Midnight Bronze			●		0.83	0.29	45	35	35
Tundra			●		0.83	0.35	45	35	35
Slate Gray			●		0.86	0.36	45	35	35
Storm Gray			●		0.86	0.30	45	35	35
Classic Green			●		0.88	0.27	45	35	35
Brite Red	●		●		0.83	0.25	45	35	35
Colonial Red			●		0.87	0.34	45	35	35
Midnight Black	●		●		0.83	0.25	45	35	35
Copper Metallic†	●		●		0.75	0.35	45	35	35
Silver Metallic†			●		0.75	0.35	45	35	35


¹ ASTM C 1371 Standard Test Method for Determination of Emittance of Materials Near Room Temperature Using Portable Emitters.

² ASTM C 1549 Standard Test Method for Determination of Solar Reflectance Near Ambient Temperature Using Portable Solar Reflectometer.

*No warranty available for Orange or Weathered Steel.

†Metallic colors incur an upcharge. Panels and trim are directional and must be installed in the same direction to prevent perceived shade variances.

Mueller, Inc. reserves the right to add or discontinue colors without notice.

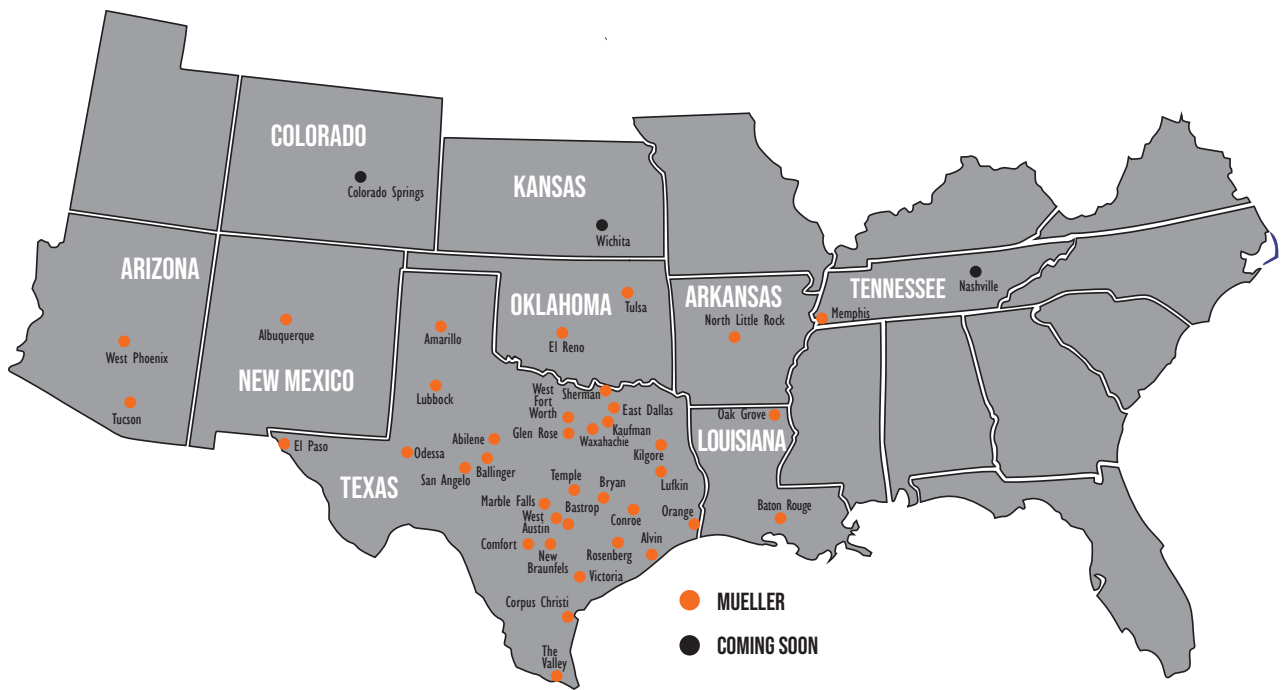

CALL: 877-2-MUELLER (877-268-3553)

CLICK: MUELLERINC.COM

COME BY: OUR CONVENIENT LOCATIONS

