

CUSTOM COIL & Flat Sheets



BENEFITS

- » Vast selection of designer colors and gauges
- » Custom coil widths and lengths (minimum of 200 linear feet)
- » Custom trim in matching colors
- » Supporting products (fasteners, underlayment, clips and closures)
- » Quick turnaround time
- » Convenient locations for easy pick up
- » Job site delivery (for a fee)




FLAT SHEETS

- » Available in full width up to 21 feet
- » 26 Gauge in 41 9/16" width
- » 24 Gauge in 43" width
- » 22 Gauge in 43" width
(Galvalume Plus, White and Weathering Steel only)

PACKAGING

Coils are packaged with rain cap, ID and OD protector.

Flats are packaged with strippable plastic and can be rolled or palletized (additional pallet charge).

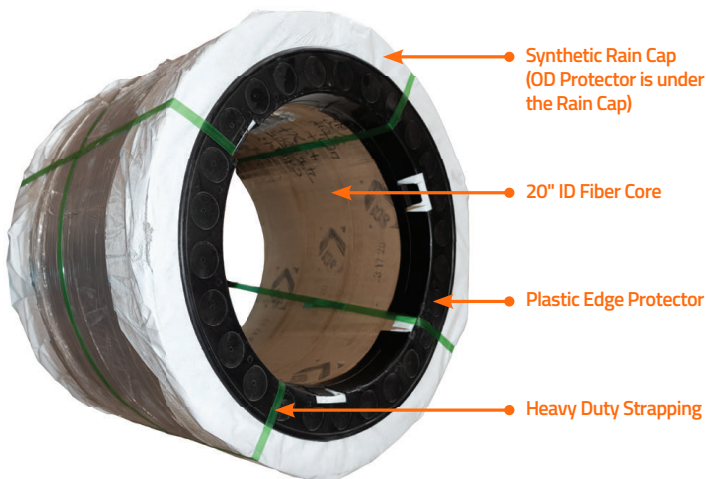

WARRANTY

Galvalume Plus is warrantied by the mill. All other colors (except for Orange, which has no warranty) fall under AKZO NOBEL liquid coatings for coil coat application limited warranty for CERAM-A-STAR™ 1050 CC and Trinar CC® coil sales only. Please visit www.MuellerInc.com/Coil-Warranty for detailed warranty information.

COIL COLOR AVAILABILITY

Color	29 Gauge Tensile Strength 80 ksi	26 Gauge Tensile Strength 80 ksi	24 Gauge Tensile Strength 50 ksi	22 Gauge Tensile Strength 50 ksi	Thermal Emittance ¹ Range 0 to 1	Solar Reflectance (TSR) ² Range 0 to 1	Film Integrity (Years)	Color Fade ASTM D 2244 (Years)	Chalk ASTM D 4214, Method A (Years)
Black		●	●		0.87 ± 0.02	0.25	40	30	30
Bright Copper		●	●		0.89 ± 0.02	0.42	35	35	35
Bright White™		●	●		0.89 ± 0.02	0.82	40	30	30
Burgundy		●			0.89 ± 0.02	0.16	40	30	30
Burnished Slate	●	●	●		0.89 ± 0.02	0.26	40	30	30
Charcoal	●	●	●		0.89 ± 0.02	0.33	40	30	30
Chestnut Brown		●			0.89 ± 0.02	0.29	40	30	30
Coco Brown	●	●	●		0.89 ± 0.02	0.31	40	30	30
Colony Green		●	●		0.89 ± 0.02	0.38	40	30	30
Deep Blue		●	●		0.89 ± 0.02	0.27	40	30	30
Deep Green		●	●		0.89 ± 0.02	0.25	40	30	30
Deep River Blue		●			0.89 ± 0.02	0.26	40	30	30
Desert Tan		●	●		0.87 ± 0.02	0.44	40	30	30
Forest Green		●			0.89 ± 0.02	0.25	40	30	30
Galvalume Plus	●	●	●	●	0.31 ± 0.02	0.68	20	20	20
Gold		●			0.89 ± 0.02	0.49	40	30	30
Hawaiian Blue	●	●			0.87 ± 0.02	0.31	40	30	30
High Gloss White	●				0.83 ± 0.02	0.67	40	30	30
Ivy Green	●	●	●		0.89 ± 0.02	0.31	40	30	30
Light Gray	●	●	●		0.87 ± 0.02	0.48	40	30	30
Light Stone	●	●	●		0.83 ± 0.02	0.59	40	30	30
Mansard Brown		●	●		0.89 ± 0.02	0.25	40	30	30
Marine Green		●			0.89 ± 0.02	0.39	40	30	30
Matte Black			●		0.83 ± 0.02	0.19	40	30	30
Orange ³		●	●		0.47 ± 0.02	0.52	n/a	n/a	n/a
Patriot Red		●	●		0.80 ± 0.02	0.42	40	30	30
Rustic Brown		●			0.89 ± 0.02	0.31	40	30	30
Rustic Red	●	●	●		0.86 ± 0.02	0.36	40	30	30
Saddle Leather Brown		●	●		0.89 ± 0.02	0.30	40	30	30
Silver Metallic		●	●		0.83 ± 0.02	0.57	35	35	35
Smokestack Gray		●			0.88 ± 0.02	0.31	40	30	30
Smokey Pewter		●	●		0.84 ± 0.02	0.45	40	30	30
Sunset Red		●			0.89 ± 0.02	0.39	40	30	30
Tan	●	●	●		0.84 ± 0.02	0.50	40	30	30
Twilight Gray		●			0.84 ± 0.02	0.59	40	30	30
White	●	●	●	●	0.89 ± 0.02	0.59	40	30	30
A606 Weathering Steel ³				●	n/a	n/a	n/a	n/a	n/a

¹ASTM C 1371 "Standard Test Method for Determination of Emittance of Materials Near Room Temperature Using Portable Emissometers"

²ASTM C 1549 "Standard Test Method for Determination of Solar Reflectance Near Ambient Temperature Using a Portable Solar Reflectometer"

³No Warranty Available for Orange or A606 Weathering Steel



CALL: 877-2-MUELLER (877-268-3553)

CLICK: WWW.MUELLERINC.COM

COME BY: OUR CONVENIENT LOCATIONS

